## CASELLA

## **HAVex**

# **HAVex**Vibration Meter

Make all the measurements necessary for Hand Arm Vibration risk assessment. The HAVex Tri-Axial Hand Arm Vibration Meter has been specifically designed for Hand Arm Vibration Exposure Measurements.



Authorised distributor



www.casellasolutions.com

#### **Applications**


- Hand Arm Vibration Exposure Measurements
- Risk assessment
- Power tool condition and maintenance database
- ISO 5349: 2001 Mechanical Vibration Guidelines for Measurement
- ANSI S2.70 (2006) guide for the measurement and evaluation of human exposure to vibration transmitted to the hand

#### **Key Features**

- Simple operation
- Robust accelerometer & cable
- Colour display
- Stores over 900 measurements
- Large measurement range
- Rechargeable battery
- Easily view, export & report data
- Supplied as a kit with everything you need to begin measuring

It's a simple to use meter that measures the levels of vibration transmitted to the hand from power tools, vehicles, machine controls and other vibration sources.

### Casella Vibdata Hand Arm Vibration Software

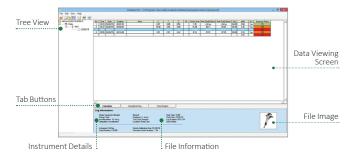

The HAVex meter is supplied with the Vibdata Lite software which allows you to download your measurements via USB for analysis and storage of data as required by the regulations. It is also possible to upgrade to Vibdata Pro which has the following added features:

- Exposure Calculator
- Merge/Combine Results
- Add Images
- Trend Analysis
- Add new records

#### **Technical Specification**

Performance: Conforms to ISO 8041: 2005 Human

Response to Vibration - Measuring

Instrumentation

Level Ranges: Low: 0.05-200m/s<sup>2</sup>, 0.005-20.4g

High: 0.5-2000m/s<sup>2</sup>, 0.05-204g

Parameters: Acceleration: Arms, Aeq, Amax, Peak,

Vector Sum, Exposure Points

Frequency Weighting: W<sub>H</sub> - Hand Arm Filter

Memory:Flash memory storing up to 992 recordingsDisplay:Full colour, graphic OLED 160 x 128Batteries:NiMH re-chargeable (typically 10 hours

continuous use)

Connections: AC Output: 4 pole 3.5mm jack

Download: USB Micro B (cable incl.)
Recharge: DC socket (charger & cable

supplied)

Environmental: Temperature: -10°C to +50°C

Humidity: up to 90% RH non-condensing





#### **Ordering Information**

M104006	Casella HAVex kit:
	Comprising of: HAVex meter, HARM Tri-axial
	Accelerometer & Cable, Mounting Plate,
	Carry Case, Vibdata Lite software

#### **Accessories**

M104009*	HARM Tri-axial Accelerometer & Cable
M104014**	Vibdata Pro Vibration Analysis Software
M104016*	Mounting Block
M104018*	Charger Unit
M104020*	USB Cable

- \* Supplied with the Casella HAVex as part of the kit
- \*\* Upgrade from the supplied Vibdata LITE software supplied with the instrument

#### Casella UK, Bedford, United Kingdom

Tel: +44 (0) 1234 844100 Email: info@casellasolutions.com

Casella China, IDEAL Industries China, Shanghai, China

Tel: +86-21-31263188 Email: info@casellasolutions.cn

Casella Australia, IDEAL Industries (Aust) Pty Ltd, Melbourne, Australia

Tel: +61 (0)395622684

Email: australia@casellasolutions.com

**Casella USA, Buffalo, USA**Tel: +1 (716) 276-3040

Email: info-us@casellasolutions.com

Casella India, IDEAL Industries India Pvt.Ltd, Haryana, India

Tel: +91 124 4495104

Email: casella.sales@ideal-industries.in



#### Dareen Global LLC

3rd Floor, Bait Qassim Building Behind Sultan center, Qurum Muscat, Sultanate of Oman Tel: +968 22700343/92803889 info@dareenglobal.com

www.dareenglobal.com